

# PHOTOMETRIC PLAN

SCALE:  
1"=20'-0"



 BRADLEY  
LIGHTING

TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_


"PCV LED CUT-OFF SERIES

The “PCV LED CUT-OFF SERIES” offers superior photometric performance with multiple distribution patterns to preserve Dark Sky environments while providing even illumination.

LED modules achieve significant energy saving and is a versatile plate that accommodates a wide range of wattages and fits in all housing sizes. The LED system is powered by the patent pending EncapLED™ module that delivers high lumen output and precise light distribution. Ideal for all area lighting applications.

## Features:

- Multiple square housing sizes
  - Weathertight housing fabricated from .063" thick aluminum
  - Continuous heliarc welds at all seams.
  - LED module plate constructed with a .125" aluminum
  - Mounting arm constructed for round or square poles
  - Philips Lumileds Chip
  - Life: L70 100,000 hours at 25c
  - Lumen efficiency: up to 115 lm/w at 5000K
  - Color Temperature: 2700K to 6000K
  - Distribution Types: II, III and V
  - Voltage Range: 120-277V
  - UL Listed Driver
  - Controls: optional 0-100% dimming, motion sensor or smart controls

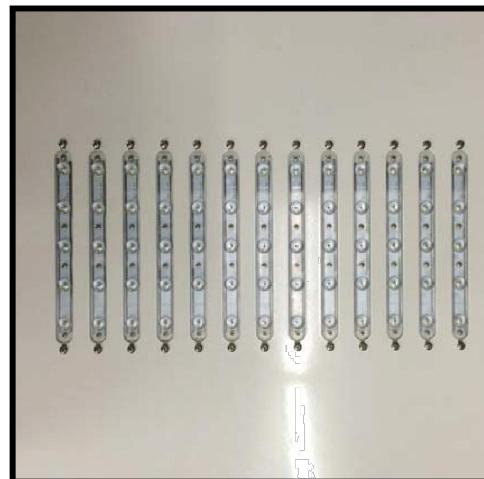

34300 Gateway Drive, Suite 120, Palm Desert, California 92211 | 800-764-4888  
[www.bradleylighting.com](http://www.bradleylighting.com)

## WALL MOUNT



TYPE: \_\_\_\_\_

"PCV LED CUT-OFF SERIES

The “PCV LED CUT-OFF SERIES” offers superior photometric performance with multiple distribution patterns to preserve Dark Sky environments while providing even illumination.

plate that accommodates a wide range of wattages and fits in all housing sizes. The LED system is powered by the patent pending EncapLED™ module that delivers high lumen output and precise light distribution. Ideal for all area lighting applications.

- Features:**

  - Multiple square housing sizes
  - Weathertight housing fabricated from .063" thick aluminum
  - Continuous heliarc welds at all seams.
  - LED module plate constructed with a .125" aluminum
  - Mounting arm constructed for round or square poles
  - Philips Lumileds Chip
  - Life: L70 100,000 hours at 25c
  - Lumen efficiency: up to 115 lm/w at 5000K
  - Color Temperature: 2700K to 6000K
  - Distribution Types: II, III and V
  - Voltage Range: 120-277V
  - UL Listed Driver
  - Controls: optional 0-100% dimming, motion sensor or smart controls



34300 Gateway Drive, Suite 120, Palm Desert, California 92211 | 800-764-4823  
[www.bradleylighting.com](http://www.bradleylighting.com)

# LIGHT POLE

## LIGHT FIXTURE CUT SHEETS

E1.0