

IRRIGATION NOTES AND DETAILS

01000 GENERAL REQUIREMENTS

- A. CONTRACTOR'S DUTIES
- EXCEPT AS SPECIFICALLY NOTED, PROVIDE AND PAY FOR:
 - LABOR, MATERIALS AND EQUIPMENT
 - TOOLS, CONSTRUCTION EQUIPMENT AND MACHINERY
 - WATER, HEAT AND UTILITIES REQUIRED FOR CONSTRUCTION
 - OTHER FACILITIES AND SERVICES NECESSARY FOR PROPER EXECUTION AND COMPLETION OF WORK
 - PAY LEGALLY REQUIRED SALES, CONSUMER AND USE TAXES
 - SECURE AND PAY FOR, AS NECESSARY FOR PROPER EXECUTION AND COMPLETION OF WORK AND AS APPLICABLE AT TIME OF RECEIPT OF BIDS:
 - PERMITS
 - GOVERNMENT FEES
 - LICENSES
 - GIVE REQUIRED NOTICES

02401 LANDSCAPE IRRIGATION SYSTEM

- A. DUE TO THE SCALE OF THE DRAWINGS, IT IS NOT POSSIBLE TO INDICATE ALL OFFSETS, FITTINGS, SLEEVES AND OTHER COMPONENTS WHICH MAY BE REQUIRED. CAREFULLY INVESTIGATE THE STRUCTURAL AND FINISH CONDITIONS AFFECTING THE WORK AND PLAN ACCORDINGLY. FURNISH SUCH FITTINGS AND COMPONENTS AS MAY BE REQUIRED TO MEET SUCH CONDITIONS. DRAWINGS ARE GENERALLY DIAGRAMMATIC AND INDICATIVE OF THE WORK TO BE INSTALLED. INSTALL THE WORK IN SUCH A MANNER AS TO AVOID CONFLICTS BETWEEN IRRIGATION SYSTEM, PLANTING AND ARCHITECTURAL FEATURES. EQUIPMENT SHOWN IN PAVED AREAS IS FOR DESIGN CLARIFICATION ONLY. INSTALL SUCH EQUIPMENT WITHIN PLANTED AREAS WHEREVER POSSIBLE.
- B. DO NOT WILLFULLY INSTALL THE IRRIGATION SYSTEM AS SHOWN ON THE DRAWINGS WHEN IT IS OBVIOUS IN THE FIELD THAT UNKNOWN OBSTRUCTIONS, GRADE DIFFERENCES OR DISCREPANCIES IN AREA DIMENSIONS EXIST THAT MIGHT NOT HAVE BEEN CONSIDERED DURING ENGINEERING.
- C. RECORD AND AS BUILT DRAWINGS
PROVIDE OWNER WITH REPRODUCIBLE SET OF AS BUILT DRAWINGS.
- D. GUARANTEE
GUARANTEE THE LANDSCAPE IRRIGATION SYSTEM FOR A PERIOD OF ONE YEAR. PROVIDE A WRITTEN GUARANTEE IN THE FORM AS STIPULATED IN THE GENERAL CONDITIONS.
- E. MINIMUM REQUIREMENTS FOR PIPING AND FITTINGS
- ASBESTOS CEMENT CLASS 150, A C400
 - CAST IRON FITTING FOR ACP, ANSI 2 1/2" 10 AND AC 1 1/2"
 - GALVANIZED STEEL SCHEDULE 40, MILD STEEL SCREWED PIPE
 - GALVANIZED MALLEABLE IRON FITTING, ANSI B 16.3
 - WROUGHT COPPER OR BRONZE SOLDER FITTINGS, ANSI B 16.22
 - PVC CONSTANT PRESSURE MAIN LINE PIPING TWO INCHES AND LARGER RUBBER RING JOINT, PVC CLASS 160, OR SOLVENT WELD JOINT, PVC CLASS 315
 - PVC CONSTANT PRESSURE MAIN LINE PIPING 1 1/2 INCHES AND SMALLER, SOLVENT WELD JOINT, PVC SCHEDULE 40
 - PVC INTERMITTENT PRESSURE LATERAL LINE PIPING SOLVENT WELD JOINT, PVC CLASS 200, SCHEDULE 40
 - PVC FITTINGS, PVC SCHEDULE 40 SOLVENT WELD AND FACTORY MANUFACTURED OF SCHEDULE 40 WITH RUBBER RING JOINT
- F. PVC PIPING
- INSTALL PVC PLASTIC PIPE AND FITTING BELOW GRADE
 - PVC PIPE MUST APPROVED TYPE 1, GRADE 1 COMPOUND CONFORMING TO ASTM D 1784
 - PVC SCHEDULE 40 AND SCHEDULE 80 PIPE, ASTM D 1785 AND ASTM D 2466
 - PVC CLASS 160, CLASS 200 AND CLASS 315 SOLVENT WELD AND RING TIGHT PIPE, ASTM D 2241
 - PVC SOLVENT CEMENT, ASTM D 2564
- G. BACKFLOW PREVENTION
- USE TYPE AS INDICATED ON THE DRAWINGS
 - ALL PIPING BETWEEN POINT OF CONNECTION AND BACKFLOW PREVENTION UNIT TO BE OF MATERIAL AS REQUIRED BY LOCAL CODE
- H. CONTROL WIRING
- USE DIRECT BURIAL COPPER WIRE UFG L F 600 VOLTS FOR CONNECTIONS BETWEEN THE AUTOMATIC CONTROLLER AND THE ELECTRIC CONTROL. VALVES NO WIRE SIZE LESS THAN #14. USE BLACK COLOR WIRE FOR PILOT, WHITE FOR COMMON.
 - INSTALL WIRING ALONG SAME ROUTE AS PRESSURE MAINLINE SUPPLY OR LATERAL LINES WHENEVER POSSIBLE
 - WHERE MORE THAN ONE WIRE IS PLACED IN A TRENCH, TAP WIRING TOGETHER AT TEN FOOT INTERVALS.
 - PROVIDE AN EXPANSION CURL WITHIN THREE FEET OF EACH WIRE CONNECTION.
 - MAKE SPICES WITH SCOTCH LOK #35777 CONNECTOR SEALING PACKS OR PEN TIE WIRE CONNECTORS. USE ONE SPICE PER CONNECTOR SEALING PACKS OR PEN TIE WIRE CONNECTORS. USE ONE SPICE PER CONNECTOR SEALING PACK, FIELD SPICES WILL NOT BE PERMITTED.


- I. SPRINKLER HEAD:
- USE SPRINKLER HEADS OF THE SAME TYPE AND SAME RATE OF PRECIPITATION WITH THE DIAMETER (OR RADIUS OF THRO) PRESSURE AND DISCHARGE AS SHOWN ON THE DRAWINGS
 - ALL SPRINKLER HEADS OF THE SAME TYPE TO BE OF THE SAME MANUFACTURER
 - INSTALL IN THE RISER UPPIPE OF EACH IMPACT HEAD ONE LINE SIZED VALVE, AND ANTI-DRAIN VALVE
 - PROVIDE AN EXPANSION CURL WITHIN THREE FEET OF EACH WIRE CONNECTION
- J. WATER SUPPLY
- SYSTEM DESIGN IS BASED ON MINIMUM OPERATING PRESSURE SHOWN AT EACH POINT OF CONNECTION. MINIMUM GPM DELAND SPECIFIED. VERIFY ALL PRESSURES ON SITE PRIOR TO CONSTRUCTION.
- K. ELECTRICAL SUPPLY
- 20 VOLT ELECTRICAL POWER OUTLET FOR AUTOMATIC CONTROLLER TO BE PROVIDED BY OTHERS. MAINT REQUIRED ELECTRICAL CONNECTION OF AUTOMATIC CONTROLLER TO OUTLET.
- L. INSTALLATION
- PROVIDE A MINIMUM OF EIGHTEEN INCHES COVER FOR ALL PRESSURE SUPPLY LINES
 - PROVIDE A MINIMUM OF TWELVE INCHES COVER FOR ALL INTERMITTENT PRESSURE LATERAL LINES
 - PROVIDE A MINIMUM OF EIGHTEEN INCHES COVER FOR ALL CONTROL WIRING
 - ALL PIPES UNDER PAVED AREAS TO BE PVC SCHEDULE 40 INSTALLED PRIOR TO PAVING
 - IN ADDITION TO CONTROL WIRE SLEEVES SHOWN ON THE DRAWINGS, INSTALL WIRE SLEEVES OF SUFFICIENT SIZE UNDER ALL PAVED AREAS PRIOR TO PAVING
 - FINAL LOCATIONS OF AUTOMATIC CONTROLLER SHALL BE DETERMINED BY THE OWNER AND/OR LANDSCAPE DESIGNER
 - FLUSH IRRIGATION SYSTEM PIPING PRIOR TO INSTALLATION OF SPRINKLER HEADS
 - INSTALL THE SPRINKLER HEADS AS DESIGNED ON THE DRAWINGS. DO NOT EXCEED MAXIMUM SPACING OF HEADS INDICATED ON THE DRAWINGS AND IN NO CASE EXCEED THE MAXIMUM RECOMMENDED BY THE MANUFACTURER
- M. ADJUSTMENT OF THE SYSTEM
- FLUSH AND ADJUST ALL SPRINKLER HEADS FOR OPTIMUM PERFORMANCE AND TO PREVENT OVERSPRAY ONTO WALKS, ROADWAYS AND BUILDINGS. SELECT THE BEST DEGREE OF ARC TO FIT EXISTING SITE CONDITIONS
 - SET ALL SPRINKLER HEADS PERPENDICULAR TO FINISHED GRADES UNLESS OTHERWISE DESIGNED ON THE DRAWINGS.

02480 LANDSCAPING PLANTING

- A. ON SITE SOIL INSPECTION
- IN ADDITION TO THESE DOCUMENTS, COMPLY WITH THE RECOMMENDATIONS OF THE SOIL SUIABILITY AND FERTILITY ANALYSIS REPORT
 - WHERE NO SOILS REPORT IS AVAILABLE OBTAIN A SOIL TEST AFTER ROUGH GRADING HAS BEEN COMPLETED. LABORATORY, P.O. BOX 6566 ORANGE, CA 92666-0566. SEND COPY OF SOIL REPORT AND RECOMMENDATIONS TO THE LANDSCAPE DESIGNER
- B. SUBMITTALS
- SUBMIT DELIVERY SLIPS FOR MATERIAL TO OWNER TO VERIFY SPECIFIED QUANTITIES OF BULK DELIVERIES OF SOIL AMENDMENTS AND FERTILIZERS
 - SEED MIXTURES FURNISH DEALER'S GUARANTEED STATEMENT OF COMPOSITION OF MIXTURE
- C. PRODUCT DELIVERY, STORAGE AND HANDLING
- DELIVER FERTILIZER TO SITE IN ORIGINAL UNOPENED CHEMICAL ANALYSIS. NAME TRADE MARK AND COMPOSITION TO STATE LAW
 - DELIVER PLANT MATERIAL WITH LEGIBLE IDENTIFICATION LABELS
 - LABEL TREES, EVERGREENS, BUNDLES OR CONTAINERS OF LIKE SHRUBS OR GROUND COVER PLANTS
 - PROTECT PLANT MATERIAL DURING DELIVERY TO PREVENT DAMAGE TO ROOT BALL OR DESICCATION OF LEAVES
 - MAINTAIN AND PROTECT PLANT MATERIAL NOT TO BE PLANTED WITHIN FOUR HOURS OF DELIVERY
- D. JOB CONDITIONS
- PERFORM ACTUAL PLANTING ONLY WHEN WEATHER AND SOIL CONDITIONS ARE SUITABLE IN ACCORDANCE WITH LOCALLY ACCEPTED PRACTICE
- E. SUBSTITUTIONS
- SUBSTITUTE PLANT MATERIAL FOR THE INDICATED PLANT MATERIAL WILL NOT BE PERMITTED UNLESS SPECIFICALLY APPROVED IN WRITING BY THE LANDSCAPE DESIGNER
- F. GUARANTEE
- GUARANTEE BOXED AND FIELD GROWN TREES TO LIVE AND GROW IN AN ACCEPTABLE UPRIGHT POSITION FOR A PERIOD OF ONE YEAR AFTER COMPLETION OF THE SPECIFIED MAINTENANCE PERIOD AND FINAL ACCEPTANCE. DEFINITION OF LIVE AND GROW: AND ACCEPTABLE UPRIGHT POSITION SHALL MEAN THAT THE TREE MUST, DURING THE GUARANTEE PERIOD, SUSTAIN A HEALTHY, VIGOROUS APPEARANCE. IF THE TREE, DURING THE VIGOROUS APPEARANCE, IF THE TREE DURING THE GUARANTEE PERIOD DOES NOT SUSTAIN THIS APPEARANCE REMOVE AND REPLACE IT WITH A TREE EQUAL TO THE ORIGINAL SPECIFICATION.


- G. PLANT STABDISHMENT PERIOD
- MINIMUM 30 CALENDAR DAYS TO BE COMPLETED BEFORE THE LANDSCAPE DESIGNER WILL RECOMMEND ACCEPTANCE BY THE OWNER
- H. MAINTENANCE PERIOD
- 60 CALENDAR DAYS FROM THE DATE OF ACCEPTANCE
- I. TOPSOIL
- USE NATURAL FRIABLE SOIL OF THE REGION, FREE FROM LUMPS, CLAY TOXIC SUBSTANCES, STICKS, DEBRIS, VEGETATION, STONES OVER ONE INCH IN MINIMUM DIMENSION AND CONTAINING NO RECOGNIZED STONE, SALT OF ALKALI
 - SALT PLUS CLAY CONTENT NOT TO EXCEED 1% BY WEIGHT
 - SOIL CONTENT NOT TO EXCEED 1 PPM AS MEASURED BY THE SATURATION EXTRACT
 - SODIUM ABSORPTION RATIO (SAR) NOT TO EXCEED 6 AND THE ELECTRICAL CONDUCTIVITY OR THE SATURATION EXTRACT NOT TO EXCEED 2.00 MILLIMOHS PER CENTIMETER AT 25 DEG C
 - FREE FROM HERBICIDES
 - FREE FROM NOXIOUS WEEDS
- J. ORGANIC AMENDMENTS
- NITROGEN STABILIZED
 - A 0.4 TO 0.6% N BASED ON DRY WEIGHT FOR REDWOOD SANDUST
 - B 0.56 TO 0.84% N BASED ON DRY WEIGHT FOR FIR OR CEDAR SANDUST
 - PARTICLE SIZE
 - A 95 100% PASSING 4.75 MM (20 STANDARD SIEVE)
 - B 60 100% PASSING 2.50 MM (NO. 60 MESH) STANDARD SIEVE
 - C 30 50% PASSING 500 MICRON (NO. 30 32 MESH) STANDARD SIEVE
 - SOLUBLE SALTS
 - A MAXIMUM 3.5 MILLIMOHS/CENTIMETER @ 25 DEG C AS DETERMINED BY THE SATURATION EXTRACT METHOD
- K. ORGANIC SOIL CONDITIONER WITH FERTILIZER
- USE GRO POWER PLUS AS MANUFACTURED BY SOUTHERN CALIFORNIA ORGANIC FERTILIZER CO. (2) 3: 245 6549
- L. COMMERCIAL FERTILIZER
- USE COMMERCIAL FERTILIZER UNIFORM IN COMPOSITION, FREE FLOTTING, CONFORMING TO STATE AND FEDERAL LAWS AND SUITABLE FOR APPLICATION WITH EQUIPMENT DESIGNED FOR THAT PURPOSE. 12-12-12 UNLESS OTHERWISE INDICATED
 - WHERE INDICATED USE AGRIFORM PLANT TABS 20-10-5. 21 GRAM TABLETS AT RATE PRESCRIBED IN MANUFACTURER'S WRITTEN SPECIFICATIONS
- M. PLANT MATERIAL
- USE PLANTS OF THE VARIETY AND SIZE AS INDICATED ON THE DRAWINGS
 - TAG ONE EACH OF EACH BUNDLE OR LOT WITH THE PLANT NAME IN ACCORDANCE WITH THE RECOMMENDATIONS OF THE AMERICAN ASSOCIATION OF NURSERYMEN
 - USE PLANTS THAT HAVE A HABIT OF GROWTH THAT IS NORMAL TO THE SPECIES, ARE SOUND HEALTHY, VIGOROUS AND FREE FROM INSECT PESTS, PLANT DISEASES, SUN SCALDS, FRESH ABRASIONS OF THE BARK, EXCESSIVE ABRASIONS OR OTHER OBJECTIONABLE DISFIGUREMENTS. TREE TRUNKS TO BE STURDY AND WELL HARDENED OFF
- N. TREE STAKING MATERIAL
- COPPER MAPHAMATE, GREEN COLOR IMPREGIATED LODGE POLE PAIR
 - A 10 FEET LONG FOR 5 AND 15 GALLON TREES
 - B 12 FEET LONG FOR 24 30" AND LARGER TREES AND 15 GALLON TREES
 - STEEL PIPE STAKES
 - A 2 (2" O.D.) SCHEDULE 40 GALVANIZED STEEL PIPE
 - B 10 G LONG WITH END CAP PAINT FLAT BLACK
 - TREE TIES
 - A SINGLE STAKE, CHINCH TIE AS MANUFACTURED BY V-T COMPANY
 - B DOUBLE STAKE, TWIST TIE AS MANUFACTURED BY V-T COMPANY
- O. WIRE TIES
- ADHERING
 - A CLEAR PLASTIC DISC WITH EYE
 - B SECURE TO SURFACE WITH ADHESIVE
 - C ATTACH WIRES TO DISC WITH GREEN PLASTIC COVERED WIRE TIES
 - NON-ADHERING
 - A 1/2" DIAMETER STAINLESS STEEL EYEBOLTS
 - B SECURE TO WALL WITH LEAD SHIELDS
 - C ATTACH WIRES TO WIRE WITH GREEN PLASTIC COVERED WIRE TIES

- HERBICIDES
- PRE EMERGENT HERBICIDES
 - A DRYED GRANULAR OR METTABLE POWDER, AS MANUFACTURED BY ELANCO. USE IN CONJUNCTION WITH TREFLAL GRANULAR OR ELANCO
 - B ENDE 501, AS MANUFACTURED BY TUCO PRODUCTS COMPANY
 - C EPTAL 66, AS MANUFACTURED BY STAUFFER CHEMICAL COMPANY
 - POST EMERGENT HERBICIDES
 - A ORTHO PARQUAT AS MANUFACTURED BY ORTHO DIVISION OF CHEVROIL CHEMICAL COMPANY. USE WITH ORTHO X-777 SPREADER (SURFACTANT)
 - B RAD E CATE 35 AS MANUFACTURED BY VIRELAND CHEMICAL COMPANY
- Q. GRAVEL/SUMP
- 2 TO 1 DIAMETER SHARP CRUSHED ROCK GRAVEL
- R. HYDRAULIC SEEDING MATERIALS
- FIBER CELLULOSE FIBER, COMBED HYDRO MULCH OR SILVIA FIBER
 - FERTILIZER
 - A 0.3 2 + 0.3% PE
 - B ORGANIC SOIL STABILANT
 - C ECOLOGY CONTROL N-BINDER
 - D TERRA TRACK IN
 - SOIL PREPARATION MIX MIXTURE PER EACH 1,000 SQUARE FEET:
 - A 6 CUBIC YARDS NITROGEN STABILIZED ORGANIC AMENDMENT
 - B 15 LBS 12-12-12 COMMERCIAL FERTILIZER
 - C 200 LBS AGRICULTURAL GYPSUM
- T. PLANTING SOIL MIX (MIXTURE FOR PLANT PIT BACKFILL)
- TOPSOIL, 10% PARTS BY VOLUME
 - ORGANIC AMENDMENT, 10% PARTS BY VOLUME
 - AGRIFORM FERTILIZER TABLETS
 - A PER EACH 15 GALLONS PLANT, 4 TABLETS
 - B PER EACH 5 GALLONS PLANT, 3 TABLETS
 - C PER EACH 1 GALLON PLANT, 1 TABLET
 - BOX TREES, 10% TABLET PER 7" OF TRUNK CALIPER
- U. PREPARATION
- VERIFY THAT FINAL GRADES HAVE BEEN ESTABLISHED PRIOR TO BEGINNING PLANTING OPERATIONS
 - DO NOT WORK SOIL WHEN MOISTURE CONTENT IS SO GREAT THAT EXCESSIVE COMPACTION WILL OCCUR. NOR WHEN IT IS SO DRY THAT DUST WILL FORM IN THE AIR OR THAT CLOUDS WILL NOT BREAK. READILY, APPLY WATER AS REQUIRED TO PROVIDE IDEAL MOISTURE FOR FILLING AND FOR PLANTING
 - REMOVE AND DISPOSE OF ALL WEED AND BURIED DEBRIS FOUND UPON ANY EXCAVATION TO ANY CONVENIENT LEGAL DUMP OR OFFSIDE LOCATION AT THE EXPERIENCE TO THE OWNER
 - MAKE ALL SOIL AREAS SMOOTH AND EVEN WITH FINISH GRADES 1 INCH BELOW THE SURFACE OF WALKS, PAVED AREAS AND CURBS AND SLIGHTLY LESS THAN FLUSH WITH CATCH BASINS, MANHOLES, CLEANOUTS, VALVE BOXES AND SIMILAR FEATURES
 - CULTIVATE ALL AREAS TO A DEPTH OF AT LEAST 6 INCHES SO THAT THE SOIL IS LOOSE AND FRIABLE FOR THE TOP TWO INCHES OF SOIL IN ALL CULTIVATED, REMOVE ALL STONES, ROOTS AND OTHER DELETERIOUS MATTER WHICH MIGHT BE A HINDERANCE TO PLANTING AND MAINTENANCE
 - FOR PLANTING AREAS, UNIFORMLY BROADCAST AND THOROUGHLY INCORPORATE SOIL AMENDMENTS TO A DEPTH OF FOUR INCHES BY MEANS OF A ROTOTILLER OR ACCEPTED EQUAL
- V. PLANTING
- DO NOT COMMENCE PLANTING UNTIL ALL CONSTRUCTION WORK, GRADING SOIL IMPROVEMENT AND IRRIGATION SYSTEM INSTALLATION HAVE BEEN COMPLETED
 - WHEN PLANT MATERIAL IS SPACED IN ROWS, VERIFY THE TOTAL DIMENSION AND SPACE THE PLANTS EQUALLY WITHIN THE DESIGNATED AREA. WHERE PLANT MATERIAL IS SHOWN IN RANDOM PATTERN SPACE THE MATERIAL AS SHOWN ON THE DRAWINGS AND AS DIRECTED BY THE LANDSCAPE ARCHITECT
 - DIG PLANT PITS WITH LEVEL BOTTOMS. WIDTH TWICE THE DIAMETER OF THE ROOT BALL AND SIX INCHES DEEPER THAN THE LENGTH OF THE ROOT BALL UNLESS OTHERWISE INDICATED
 - PROVIDE GRAVEL FILL AUGER DRILLED DRAINAGE SUMPS FOR ALL TREE INDICATED ON THE DRAWINGS. SEE PLAN DETAILS FOR NUMBER AND SIZE
 - SET PLANTS IN PLANT PITS SO THAT THEY BEAR THE SAME RELATION TO SOIL LEVEL WHEN PLANTED AS THEY DID WHEN IN CONTAINER. CENTER PLANT IN PIT
 - BACKFILL PLANT PIT WITH SPECIFIED SOIL MIX. FIRM DOWN, ELIMINATING ALL AIR POCKETS. DO NOT PACK FORM A SHOULDER BASIN AROUND THE PLANT TO HOLD ENOUGH WATER TO SATURATE THE ROOT BALL AND BACKFILL WATER PLANTS IN IMMEDIATELY AFTER PLANTING
 - FILL ALL PLANTERS WITH PLANTING SOIL TO WITHIN THREE INCHES FROM TOP OF PLANTER

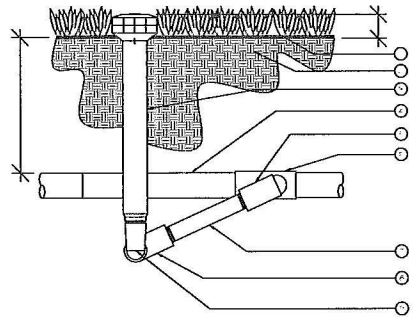


- NOTES
- USE TEFLON TAPE ON ALL MALE PIPE THREADS FOR PVC TO PVC CONNECTIONS. DO NOT USE PIPE DOPE. SET PERIMETER HEADS 4" FROM CURBS AND WALKS AND 6" FROM VERTICAL OBJECTS SUCH AS FENCES, WALLS, AND BUILDINGS ETC. USE ONLY BOTTOM INLET OF HEAD

A HI-POP SPRAY HEAD

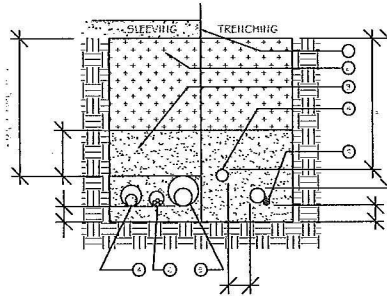

- NOTES
- ALL SLEEVES TO BE SCH 40 PVC. SIZE ALL SLEEVES PER SLEEVEING CHART ON PLANS
 - EXTEND SLEEVES 12" BEYOND EDGE OF HARDSCAPE ON BOTH ENDS. RECLAIMED WATER SLEEVES TO BE MINIMUM 42" DEEP (OR PER WATER DISTRICT STANDARDS WHERE APPLICABLE)

B TRENCH/SLEEVEING



- NOTES
- WALL MOUNT CONTROLLER, MOUNT PER MANUFACTURER
 - LOCKING NUT
 - ELECTRICAL JUNCTION BOX
 - 20 V WIRE IN RIGID CONDUIT PER LOCAL CODES
 - RIGID CONDUIT FOR COMMON/CONTROL WIRES
 - SWEET EL SIZE AS REQUIRED
 - FINISH GRADE FLOOR SURFACE FOR INDOOR MOUNT
 - MOUNT CONTROLLER AT EYE LEVEL (+/- 5")

C WALL MOUNT CONTROLLER

IRRIGATION & PLANTING PLAN REDESIGN BY BILLZILLNER
LICENSED LANDSCAPE CONTRACTOR # 439242. I HAVE COMPLIED WITH THE CRITERIA OF THE ORDINANCE AND APPLIED THEM ACCORDINGLY FOR THE EFFICIENT USE OF WATER IN THE IRRIGATION DESIGN PLAN

REVISIONS	DRAWN	CHECKED	DATE

RC PLANS
BUILDING DESIGN / HOME PLANS
1430 SHERIDAN RD.
SAN BERNARDINO, CA 92407
CREATIVE DEVELOPMENT & QUALITY
(909) 991-3346
IN GOD WE TRUST
RICHARD CLOSTRE

OWNER / CLIENT
VICTOR HERNANDEZ MUNOZ
2930 RIMROCK CIRC.
CORONA, CA 92626
PH. # (951) 235-0974 MIGUEL
PH. # (951) 475-7229

STAR LIFE LODGE
13105 PALM DRIVE
DESERT HOT SPRINGS, CA

ARCHITECT
ALEJANDRO RESENDIZ
LICENSE No C-11660
PHONE No 909 455-4506

DATE 7/10/2016
DRAWN R.C.
SCALE AS SHOWN
JOB NO. 10-2014
LD-2