




EX. PROJECT BOUNDARY

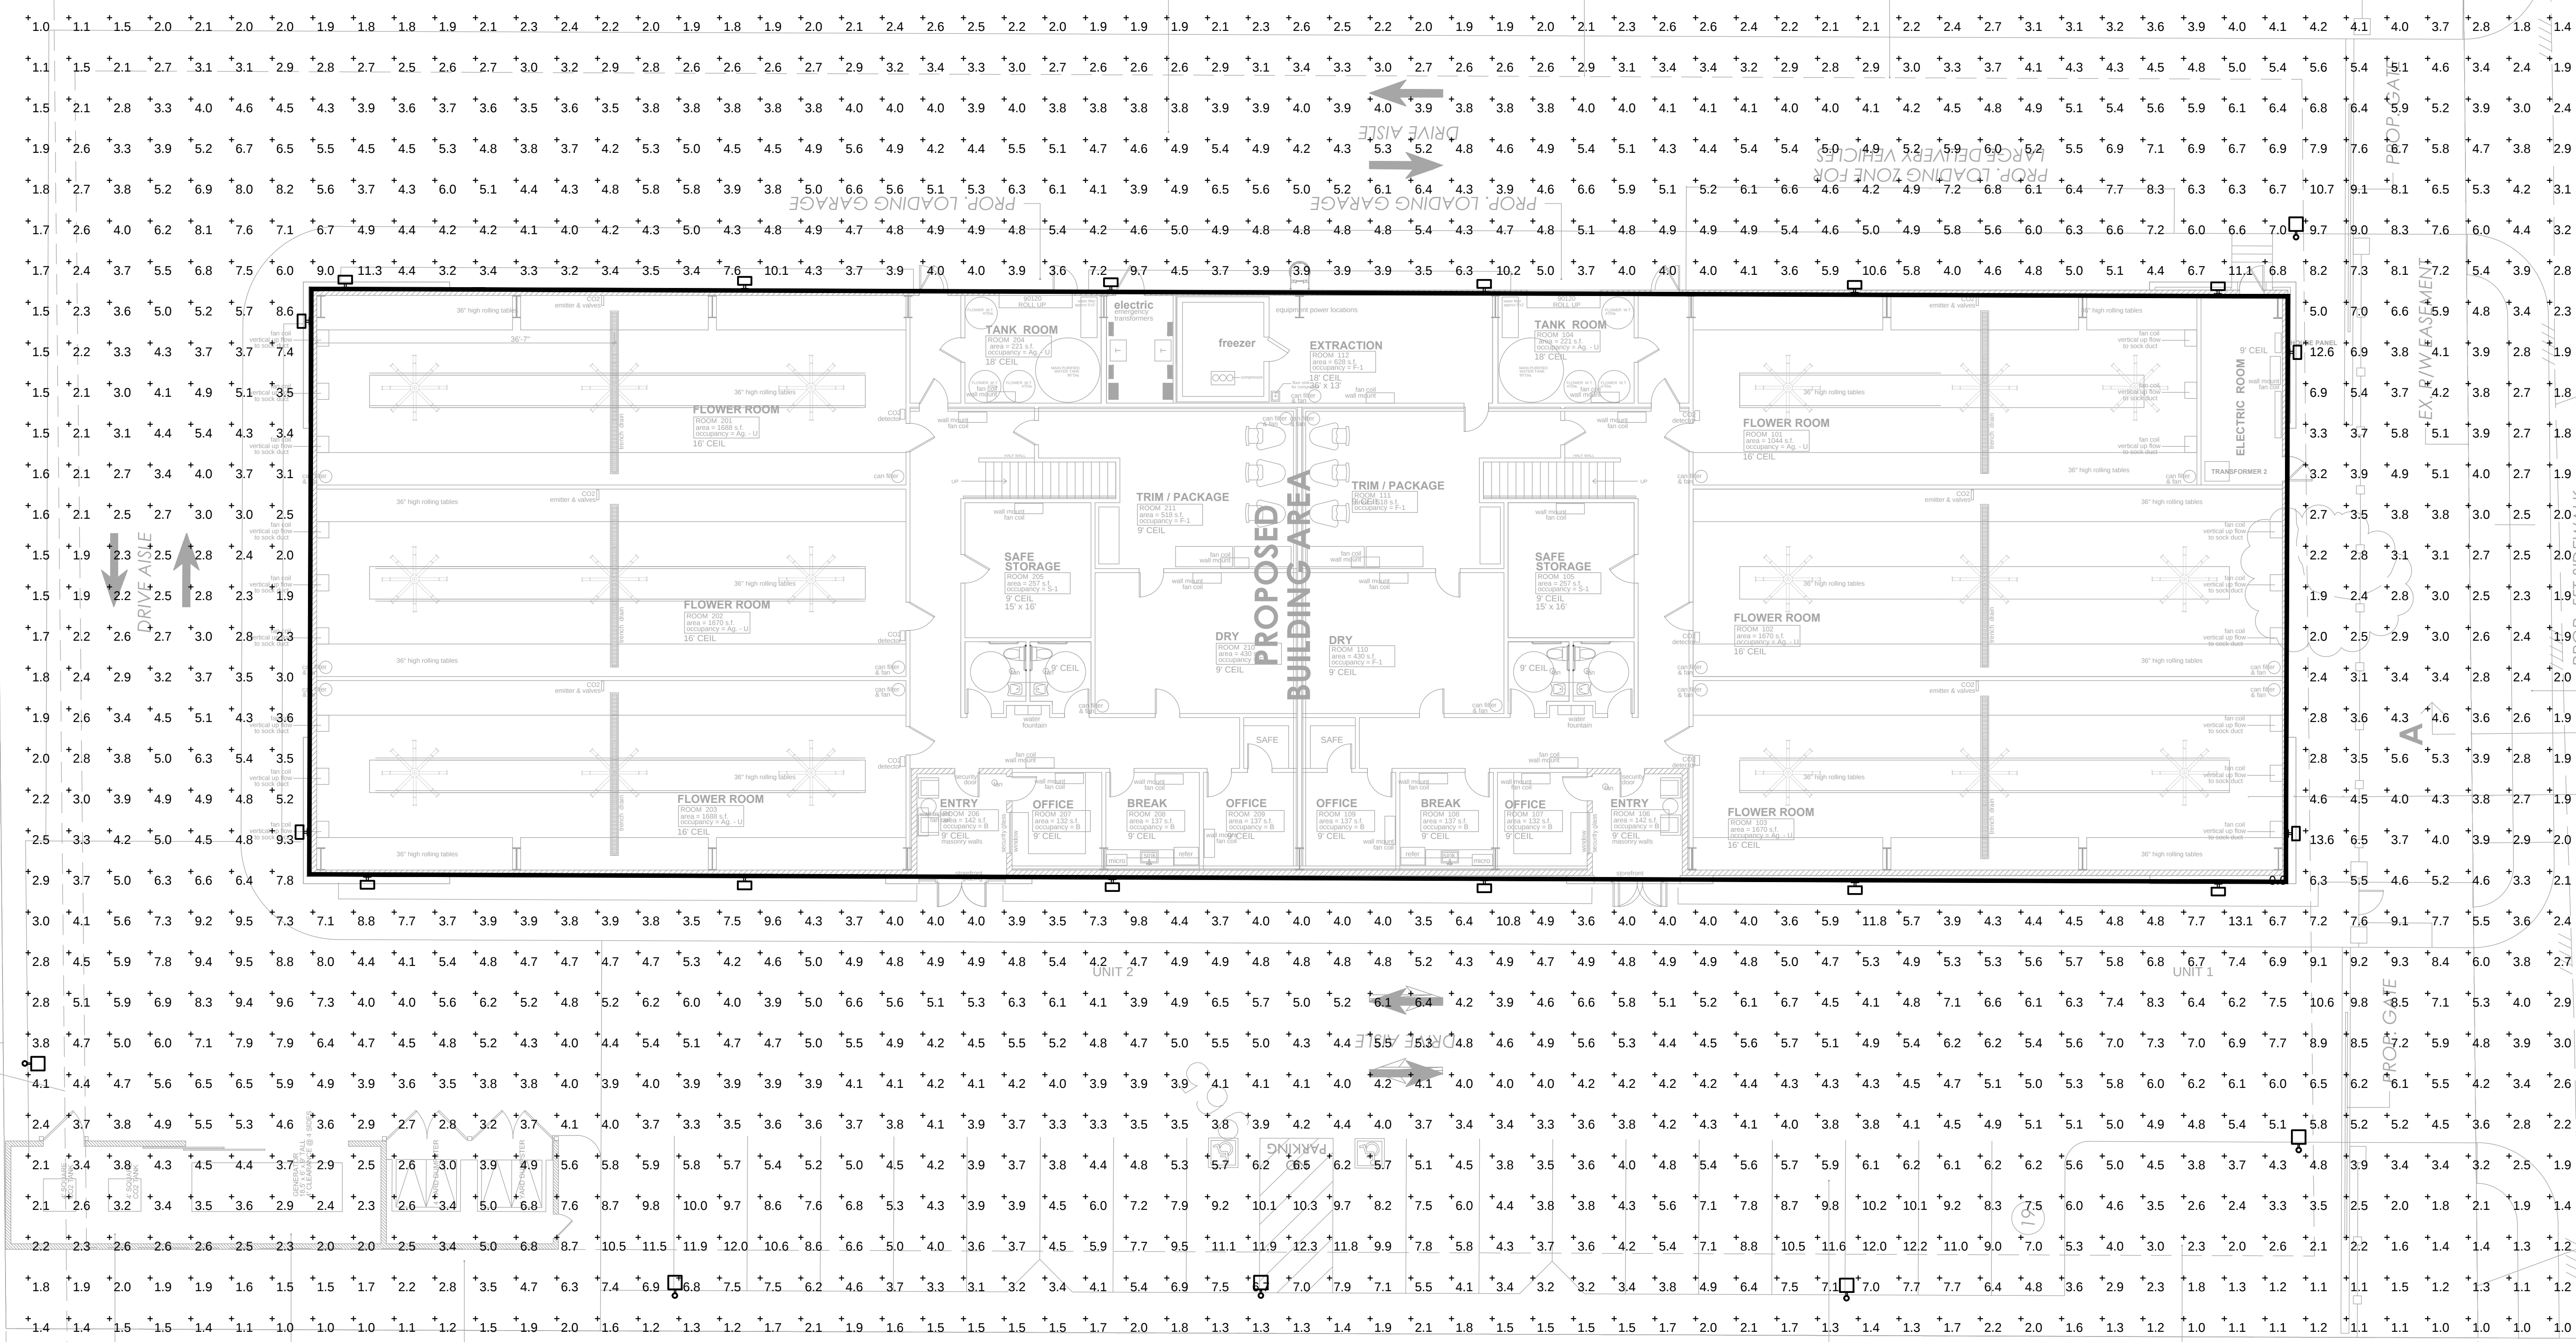


30' ESMT. FOR ROAD PURPOSES
AS SHOWN ON RS 25/84

PALOMAR LANE

- EX. E/P

EX. C/L & PROJECT BOUNDARY

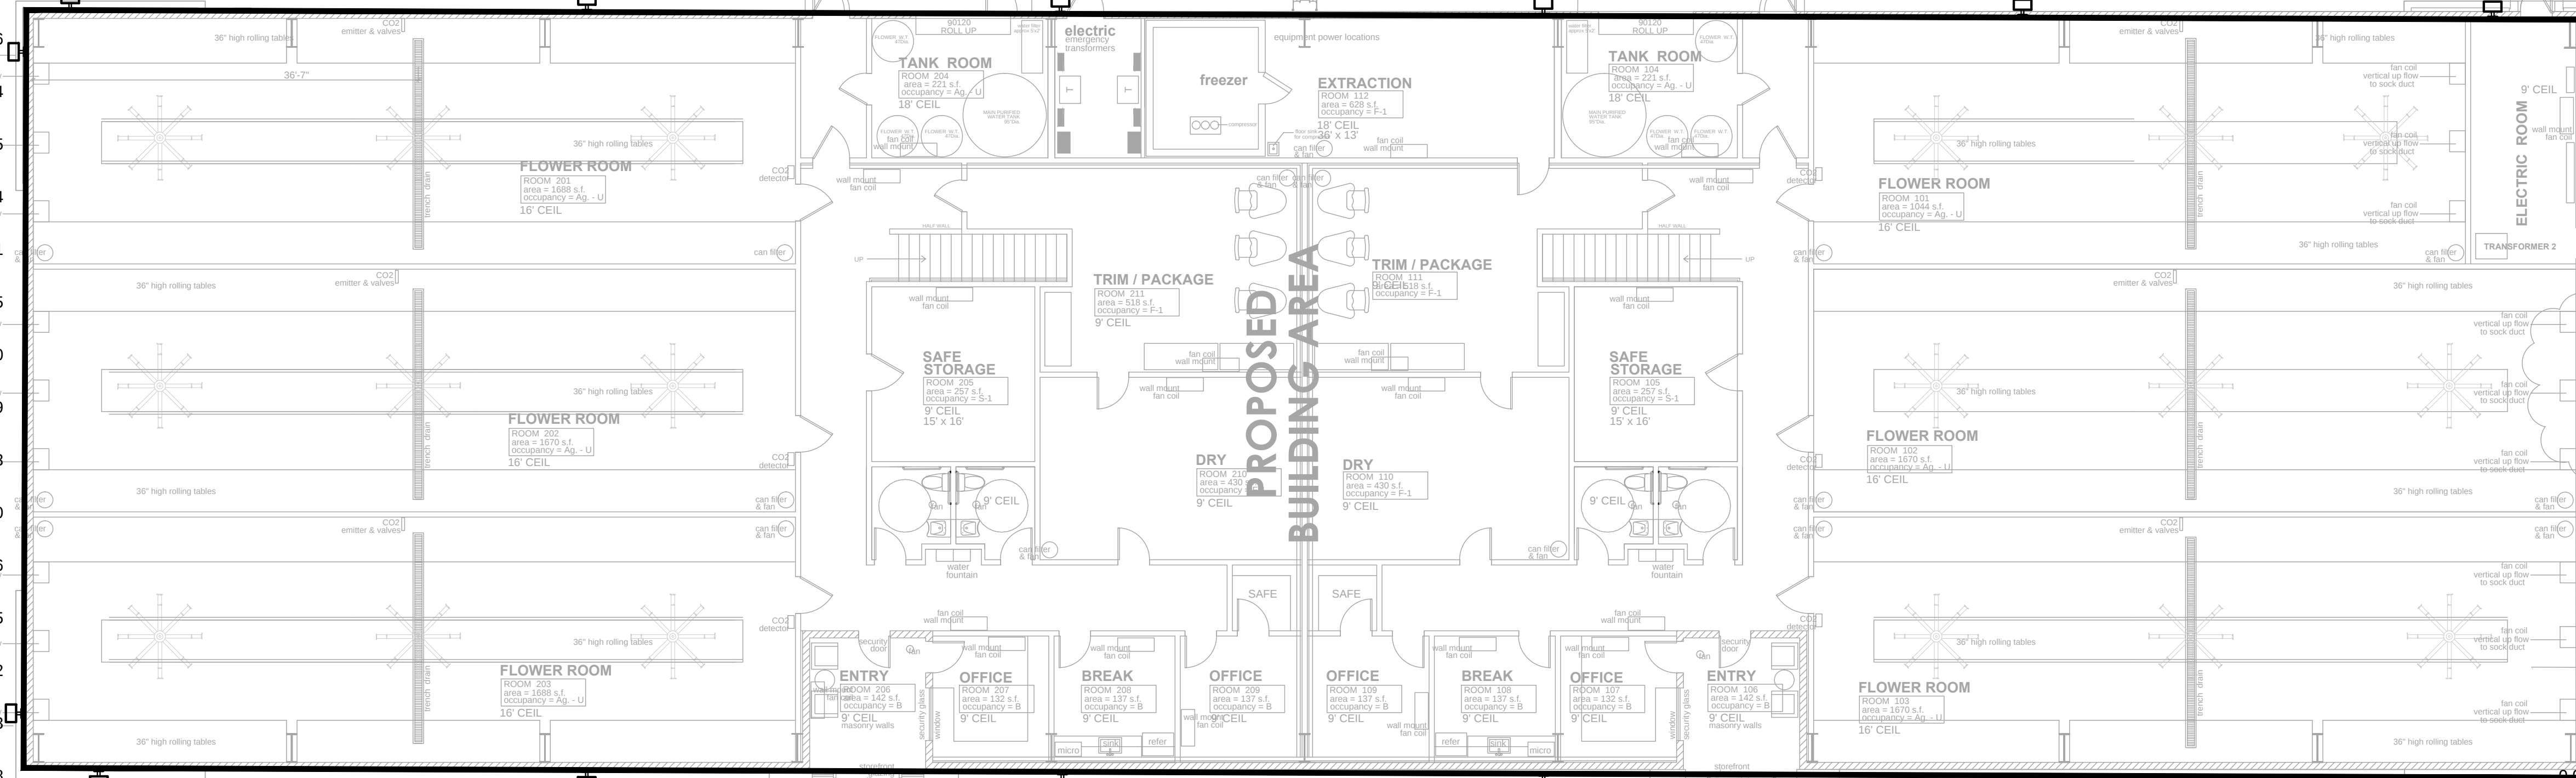

PHOTOMETRIC SITE PLAN

SCALE:	2
11.10% C	

VIPER S SERIES

SMALL LINEAR LUMINAIRE

SPECIFICATIONS

Intended Use

The Beacon VIPer S luminaires are available with a wide choice of different LED lighting configurations and optical distributions, designed to replace HD lighting up to 600W MH or HPS.

Construction

- Manufactured with die cast aluminum.
- Comes with a polycarbonate front that meets ASTM B177 corrosion test requirements and ASTM D2527 cracking and loss of adhesion test requirements.
- External hardware is corrosion resistant.
- One-piece optical carriage system consisting of LED engine, LED lenses, optics, gasket and stainless steel bezel.
- Cartridge is held together with internal brass screws, exposed to the bezel so that it can be held in place as a one-piece optical system.
- Two-piece design and micro-etched polycarbonate from gasket ensures a weather-proof seal and meets technical LED.

Electrical

- LED output: 7770, 105, 50, 60, 80, 90, 120, 140, 160, 180, 200, 220, 240, 260, 280, 300, 320, 340, 360, 380, 400, 420, 440, 460, 480, 500, 520, 540, 560, 580, 600, 620, 640, 660, 680, 700, 720, 740, 760, 780, 800, 820, 840, 860, 880, 900, 920, 940, 960, 980, 1000, 1020, 1040, 1060, 1080, 1100, 1120, 1140, 1160, 1180, 1200, 1220, 1240, 1260, 1280, 1300, 1320, 1340, 1360, 1380, 1400, 1420, 1440, 1460, 1480, 1500, 1520, 1540, 1560, 1580, 1600, 1620, 1640, 1660, 1680, 1700, 1720, 1740, 1760, 1780, 1800, 1820, 1840, 1860, 1880, 1900, 1920, 1940, 1960, 1980, 2000, 2020, 2040, 2060, 2080, 2100, 2120, 2140, 2160, 2180, 2200, 2220, 2240, 2260, 2280, 2300, 2320, 2340, 2360, 2380, 2400, 2420, 2440, 2460, 2480, 2500, 2520, 2540, 2560, 2580, 2600, 2620, 2640, 2660, 2680, 2700, 2720, 2740, 2760, 2780, 2800, 2820, 2840, 2860, 2880, 2900, 2920, 2940, 2960, 2980, 3000, 3020, 3040, 3060, 3080, 3100, 3120, 3140, 3160, 3180, 3200, 3220, 3240, 3260, 3280, 3300, 3320, 3340, 3360, 3380, 3400, 3420, 3440, 3460, 3480, 3500, 3520, 3540, 3560, 3580, 3600, 3620, 3640, 3660, 3680, 3700, 3720, 3740, 3760, 3780, 3800, 3820, 3840, 3860, 3880, 3900, 3920, 3940, 3960, 3980, 4000, 4020, 4040, 4060, 4080, 4100, 4120, 4140, 4160, 4180, 4200, 4220, 4240, 4260, 4280, 4300, 4320, 4340, 4360, 4380, 4400, 4420, 4440, 4460, 4480, 4500, 4520, 4540, 4560, 4580, 4600, 4620, 4640, 4660, 4680, 4700, 4720, 4740, 4760, 4780, 4800, 4820, 4840, 4860, 4880, 4900, 4920, 4940, 4960, 4980, 5000, 5020, 5040, 5060, 5080, 5100, 5120, 5140, 5160, 5180, 5200, 5220, 5240, 5260, 5280, 5300, 5320, 5340, 5360, 5380, 5400, 5420, 5440, 5460, 5480, 5500, 5520, 5540, 5560, 5580, 5600, 5620, 5640, 5660, 5680, 5700, 5720, 5740, 5760, 5780, 5800, 5820, 5840, 5860, 5880, 5900, 5920, 5940, 5960, 5980, 6000, 6020, 6040, 6060, 6080, 6100, 6120, 6140, 6160, 6180, 6200, 6220, 6240, 6260, 6280, 6300, 6320, 6340, 6360, 6380, 6400, 6420, 6440, 6460, 6480, 6500, 6520, 6540, 6560, 6580, 6600, 6620, 6640, 6660, 6680, 6700, 6720, 6740, 6760, 6780, 6800, 6820, 6840, 6860, 6880, 6900, 6920, 6940, 6960, 6980, 7000, 7020, 7040, 7060, 7080, 7100, 7120, 7140, 7160, 7180, 7200, 7220, 7240, 7260, 7280, 7300, 7320, 7340, 7360, 7380, 7400, 7420, 7440, 7460, 7480, 7500, 7520, 7540, 7560, 7580, 7600, 7620, 7640, 7660, 7680, 7700, 7720, 7740, 7760, 7780, 7800, 7820, 7840, 7860, 7880, 7900, 7920, 7940, 7960, 7980, 8000, 8020, 8040, 8060, 8080, 8100, 8120, 8140, 8160, 8180, 8200, 8220, 8240, 8260, 8280, 8300, 8320, 8340, 8360, 8380, 8400, 8420, 8440, 8460, 8480, 8500, 8520, 8540, 8560, 8580, 8600, 8620, 8640, 8660, 8680, 8700, 8720, 8740, 8760, 8780, 8800, 8820, 8840, 8860, 8880, 8900, 8920, 8940, 8960, 8980, 9000, 9020, 9040, 9060, 9080, 9100, 9120, 9140, 9160, 9180, 9200, 9220, 9240, 9260, 9280, 9300, 9320, 9340, 9360, 9380, 9400, 9420, 9440, 9460, 9480, 9500, 9520, 9540, 9560, 9580, 9600, 9620, 9640, 9660, 9680, 9700, 9720, 9740, 9760, 9780, 9800, 9820, 9840, 9860, 9880, 9900, 9920, 9940, 9960, 9980, 10000.
- Power factor is 0.91 at full load.
- All electrical components are rated at 50,000 hours of full load and 50°C ambient conditions per MIL-217F Notice 2.
- Dimmers: dimmers are standard, but contact factory to request wiring leads for purposes of external dimming controls.
- Component-to-component wiring within the luminaire may vary in the order of 100% at rated load and is certified by UL to vary at 6000°C at 80°C or higher.
- Wiring disconnects are certified by UL to vary at 600 VAC, 15A or higher, 15A rating applies to primary (AC) side only.
- Photo electric temperature control and constant LED driver temperature control are built with a push-button terminal block and provide power connections.
- The luminaire is designed for an optional two-wire, 0-10V dimming system.
- Ambient operating temperature: -40°C to 40°C.
- Energy performance: 100lm/W.
- Option 9 (if ANSI C136.1-41 2013 black body photo compatible) available with LED chips with ANSI C136.1-41 external voltage (no warranty).
- Utilitrac® Circuit - protects luminaires from excessive currents. The device shall activate at a specified, factory preset temperature, and progressively reduce power over a finite temperature range. Operation shall be smooth and undetectable to the user. Thermal circuit is designed to "fail on".
- The luminaires is intended to be full power in the event of an interruption of the power supply or faulty wiring connection to the luminaire. The device shall be able to co-exist with other 1 to 100 current device (passive sensors, external dimmers, etc.).

Call
Job
Type

Approvals

[illegible]

CANNA VALLEY CULTIVATION FACILITY

PALOMAR LANE

CITY OF DESERT HOT SPRINGS, CA. 92204

814-426-4469 Napaving@msn.com

PHOTOMETRIC SITE BI AN

REVISIONS	
DESCRIPTION	DATE

REVISED BY: J.N.V.
9-29-15

REVISED BY: J.N.V.
9-29-15

E1.0

SCALE:	1
N/A	



Jeffery N. Villa 383

M|RC
ENGINEERING, INC.

Project Number: 16165

Professional Engineers & Lighting Consultants
o: 760-340-9005 f: 760-340-9100
PALM DESERT | SANTA ANA | SAN DIEGO



MRC
ENGINEERING, INC.